

SM3+ V2 User manual

Software, drivers and latest info can be downloaded at
www.Kperformance.be

Introduction

Congratulation for buying the SM3+. The circuit is based on MegaSquirt 3 and pinout of the KdFi1.4 modules. Making the SM3 backwards compatible with the MS2 KdFi1.4 users and boards. It was refined and build 100% AEC-Q100 compliant. A KPerformance Wideband Lambda Controller is also part of the SM3 board. A Bosch LSU 4.9 sensor can be connected directly without a extra controller.

Included in Delivery

- SM3+ Module and/or additional PCB
- USB plug*
- User manual
- Molex connector,inserts & solder header

Software

Recommended tuning software TUNERSTUDIO and/or Megalog viewer

USB Driver

The onboard FTDI chip simulates a serial RS232 connection:

TunerStudio – Communications – Settings: USB and Wireless (only in registered Version), Auto , 115200 Baud

USB Port

The USB port of the SM3 is equipped with 8kV ESD protection of VBUS and Data lines. The data chip and ESD protection is "USB powered". This simplifies the start-up behaviour significantly when you restart the ignition, the PC won't download the USB driver each time. The USB chip is downwards compatible, it can be used both with USB 3.0, 2.0 and 1. Each standard USB cable can be used as connection cable, but preferable with FERRIT core further avoiding ESD spikes.

Electrical connections

Like all other voltage supplied parts - must be preceded by a fuse in function of cable section.

Recommended cable types:

- Ignition: min 1 mm²
- Injection: min 1 mm²
- VR sensor: min 0.5 mm²
- Shielded Sensors: min 0.35 mm²
- Others: min 0.35 mm²

Fuses

Recommend using a 3A fuse for protecting the SM3. A automated 5A PTCC fuse is integrated on the board. It will reset itself after cooling down/solving issue or short circuit.


Onboard LED functions

LED Label	Color	Function
LD2	ORANGE	5V power supply
LD3	ORANGE	O2 controller standby blinking/power solid
LD4	ORANGE	O2 controller heating 2Hz/measuring blinking 1hz
LD5	ORANGE	USB Data packets
LD6	ORANGE	USB Data packets
LDA	ORANGE	Ignition pulse A
LDB	ORANGE	Ignition pulse B
LDC	ORANGE	Ignition pulse C
LDD	ORANGE	Ignition pulse D
LDE	ORANGE	Ignition pulse E
LDF	ORANGE	Ignition pulse F
LDG	ORANGE	Ignition pulse G
LDH	ORANGE	Ignition pulse H

Onboard O2 controller LED functions

LED	Status	Function
STS	Fading in	Heating sensor status
PWR	Solid	
STS	Blinking Slow	Operational measuring status
PWR	Solid	
STS	Blinking FlipFlop	Sensor disconnected/Error
PWR	Blinking FlipFlop	
STS	OFF	Power low
PWR	Blinking	

Pinouts(Zoom in)

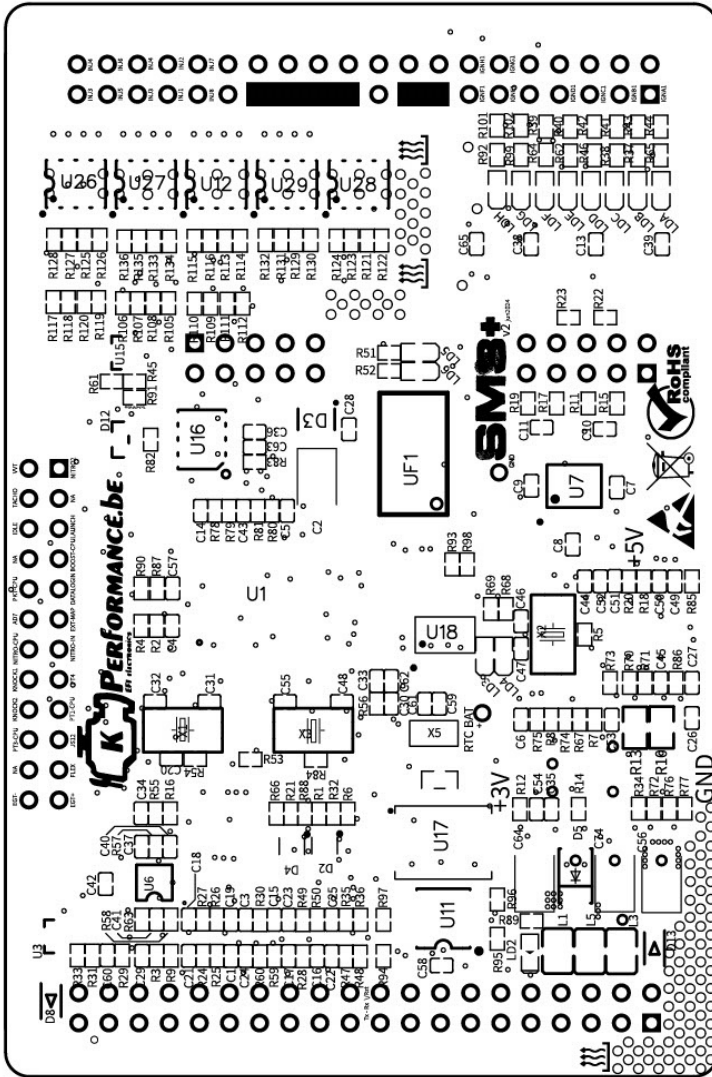

Engine Speed Measurement

Please use the DIP switches(Retro-Fit KdFi v1.4 boards) to select the type of inputs you need.

Switches 1 and 2 are for the primary input which can also be the CAM signal e.g. in the distributor if you don't have a Cranksignal.

Switches 3 and 4 are for the second input if you use crank (1) and cam (2) input. Please do not activate VR and HALL for one sensor at the same time. This will not work properly.

1. VR Sensor The measurement via VR sensor is the most widespread way in Europe for car engines. An AC voltage is induced in the coil of the VR sensor by a trigger wheel with 60-2 or 36-1 tooth.

2. HALL sensor may require a pull-up resistor of 1k to 10k ohm between signal-out and +5V.

Throttle Potentiometer

The throttle potentiometer is connected up by a 3-wire cable. +5V and GND are connected to the outer static pins of the potentiometer. The voltage relating to the throttle position is tapped via the sliding contact and connected to the input TPS (Throttle Position Sensor). The covered distance of the potentiometer may be longer than the rotation of the throttle axle. The corresponding calibration is done via "Tools" – "Calibrate TPS"

Digital Inputs

There are digital inputs that can be used for example as “Launch Control”. The corresponding function has to be defined in TunerStudio.

Spare CPU pins

BE very careful when using these !!Direct CPU Pins!! they have no RC-filtering nor safety components. Incorrect usage can destroy CPU inputs,

Preferable use GND activated inputs

Analog Inputs

There are analog inputs that can be used for example as “Additional temp”. The corresponding function has to be defined in TunerStudio.

Idle Speed Controller (Fidle)

The SM3 supports both the 2-pin and the 3-pin idle speed valves.

Pin connections of the idle speed control:

2-pin: +12V & FDLO

3-pin: +12V & FDLO (open) & FDLC (closed)

The FDLO & FDLC are automatic inverted on the PCB, use Fidle control under TunerStudio,

Ignition

There are 8 **Active** coils (IGN1-8) can be activated sequential .

Injection

There are 6 injector outputs (INJ1-8) ; The injection valves are supplied with +12 V via the ignition switch and the ground wires of the injectors are activated via the SM3

Attention:

The setting whether the injection valves are of high or of low resistance has to be entered in Basic Settings” – “Injector Characteristics” strictly before the first test run because wrong settings can cause destruction of the injection valves or of the SM3a.

Starting values (no guarantee):

High impedance: PWM Current Limit (%): 100 PWM Time Threshold (ms): 25.5

Low impedance: PWM Current Limit (%): 30 PWM Time Threshold (ms): 1.5

Bluetooth or Wifi Connection

Optional bleutooth or wifi connection **only** in combination with Full SM3+ ECU

Onboard Wideband Lambda Controller


A Bosch LSU 4.9 sensor can be connected directly without the need to buy a further controller.

Calibration data TUNERSTUDIO custom linear wideband:

0V = AFR 22.35 = Lambda 10.20

4V = AFR 9 .5 = Lambda 0.650

Starting of the controller can be done by Software grounding or via dipswitch (Retro-Fit KdFi v1.4 boards). Software wise by selecting Output “PT5-JS10 ”with customer requirements setting. Ie start lambda controller after 30sec of engine start under tunerstudio

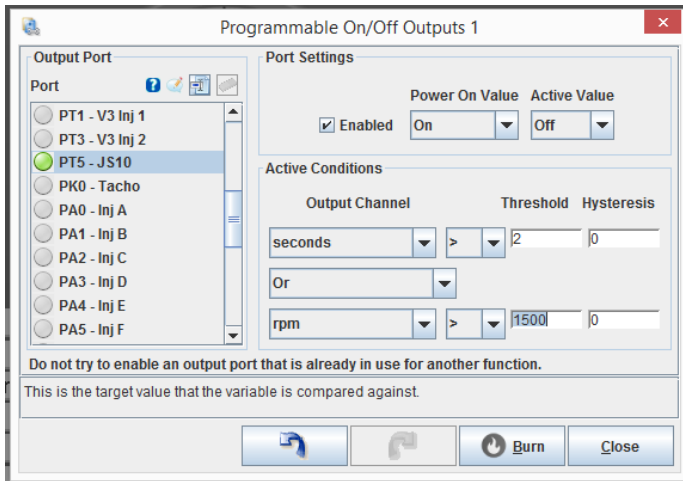

Not grounding will result in a standby lambda controller.

Lambda Controller Tunerstudio Gauge

Heating sensor: Gauge fades in until sensor is hot

Sensor disconnected: Gauge swings from Max to Min

Sensor short to GND: Gauge show sstatic value ~12.5

Sensor short to Batt: Gauge shows static value ~19

Heater Short to GND: Gauge shows static value ~15.5

Onboard Knock

The knock IC uses a purpose designed knock sensing amplifier chip to filter knock signals.

Knock Wiring:

Knock Sensor1-> Knock1 ECU input and ECU ground

Knock Sensor2-> Knock2 ECU input and ECU ground

Onboard datalogging

The board is equipped with 1Gb of onboard SMD-sized memory.

Ready to be used under SD datalogging menu

Onboard RTC (real time clock)

The board is equipped with a very accurate RTC, giving the possibility to add 'time stamps' to the onboard data logging feature!

Making data logs easier to read, easier fault and/or tuning improvements.

CAN Bus

Like MegaSquirt the CAN Bus hardware is populated on the board, but has to be programmed accordingly by the user if desired. For further information on this item please read the respective Megasquirt /MSextra websites.

User Remarques and info